

**THE PERTEC FAMILY OF FLEXIBLE
DISK DRIVES:** THE KIND OF DRIVES
AN OEM WOULD DESIGN HIMSELF



THE KIND OF DRIVES AN OEM WOULD DESIGN HIMSELF

Storage Capacities: 6.4 million bits (unformatted with FD5X0 and FD511); 3.2 million bits (unformatted with all models); IBM compatible (242,944 bytes all models).

Ferrite Read/Write Heads: *totally* IBM compatible; 20,000 hour head life; 5 million passes on a single track.

Superior Track Positioning Accuracy: positioner uses 3-step movement track-to-track.

Unique Retractable Head System with Pad: contacts media *only* when reading or writing data.

Choice of AC or DC Motors: lowest power consumption of any IBM compatible flexible disk drive.

Precision Steel Chassis: temperature compensation of steel provides greater track accuracy.

Smallest Available IBM Compatible Models: compact units fit horizontally (2) or vertically (4) in standard racks.

MTBF: exceeds 10,000 power-on hours.

Two-State Positive Latching Door: Provides operator convenience for removal and replacement of diskette.

Optional Interfaces

Wide applications, products that simplify your design time, reliability that begins before you buy are just a few of the needs of most OEMs.

It took the world's largest independent manufacturer of multiple peripheral devices to combine the inherent benefits of flexible disk with an experienced knowledge of OEM needs. The result: a unique, unmatched product family—the Pertec family of flexible disk drives. The most versatile, compact, and reliable disk drives in the world.

Compact size makes easy incorporation into your system. Each model of Pertec's flexible disk drives is only 8.8 cm x 21.8 cm x 36.2 cm (3.45" x 8.6" x 14.2"). You can mount two units horizontally or four units vertically in a standard RETMA enclosure.

The FD400 provides you with a DC motor in a compact chassis. The FD5X0 and 511 provide double density capability, a two-state positive latching door and a small AC motor. And the same compact chassis size as the FD400. All models provide you with the benefits of flexible disk and Pertec's experience in designing peripheral equipment for the OEM.

STORAGE CAPACITIES

Up to 6.4 million bits (unformatted) of information may be reliably stored and retrieved on the FD5X0 and 511. All models have standard storage capacities of 3.2 million bits (unformatted). In IBM format, the flexible disk cartridge—*diskette*—stores 242,944 bytes or 1898 128-byte data records.

By abandoning the IBM format, you can double the data density using the optional capabilities of the FD5X0 and 511.

Ferrite Heads Mean Longer Head/Media Life. All Pertec flexible disk drives incorporate ferrite read/write heads. Ferrite heads yield a head life of 20,000 hours. And because there's no foreign particle embedment in a ferrite head, your media life is extended to 5 million passes on a single track.

Exclusive Retractable Heads Extend Media Life. Pertec's unique, exclusive head retract system allows both the head and pad to be in contact with the diskette *only* when actually reading or writing. When loading or unloading, the medium is never touched by the head assembly. This means less chance for data deterioration plus a longer media life. A real customer benefit in selling your system.

You Choose: AC or DC. Now you have a choice. In the FD400 the DC motor, with a direct drive spindle, gives you control over speed while allowing you to market your system internationally without concern about changing power requirements.


Or choose the FD5X0 or 511. The same small size chassis with an AC motor. And it has the voltage ranges to eliminate any concern over transformer taps.

Each model consumes less power than any other available flexible disk drive.

Only Pertec Provides a Steel Chassis for Exceptional Temperature Compensation. So you'll get higher data reliability. The basic chassis centers around a precision stamped steel plate which provides a single reference surface to which all critical mechanical components are attached. The steel material provides an optimum overall temperature compensation which ensures increased track location accuracy.

High Accuracy Track Seeking. A 3-phase stepper motor/lead screw assembly and associated electronics moves the head position from track-to-track. The result is a 3-steps-per-track linear movement, rather than the typical one-step-per-track. Thus, you'll receive superior track locating accuracy and the reduced system friction that causes hysteresis error.

Optional Interfaces. We'll even supply you with optional interfaces allowing you to replace other manufacturers' units with the Pertec FD400, 5X0 or 511. We want you to enjoy the added benefits of Pertec flexible disk drives even though you may have previously chosen other units.

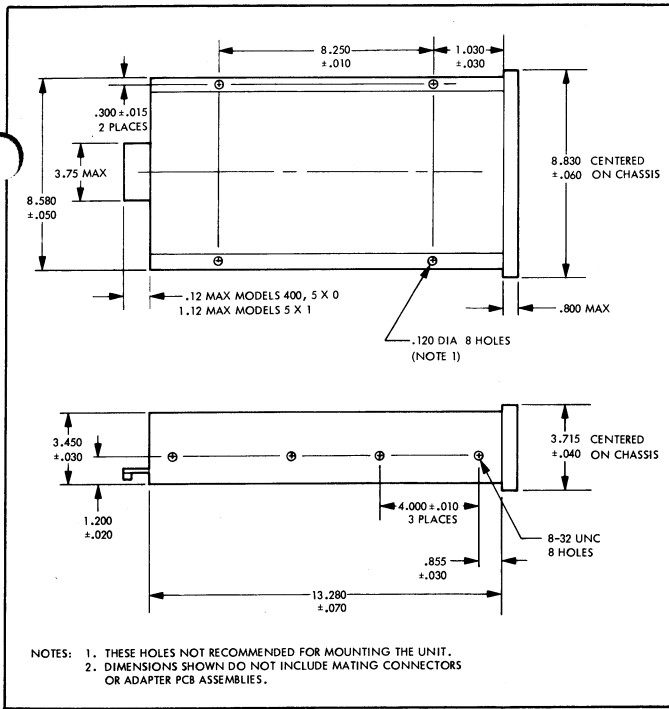

Data Lines

Write Data Input. Serial data in double frequency mode is applied to this line for file writing in conjunction with the activation of "Write Enable".

Read Data Output. The read data output line is not gated separately in the drive electronics. The read data cell is nominally 4 microseconds. The clock and data pulse width are 200 nanoseconds ± 50 for double frequency encoding.

THE FD511 OFFERS THESE ADDITIONAL INTERFACE LINES

Input

Select (0-3). When true, these interface lines select the drive in a daisy chain environment.

Head Load Enable (0-3). When true, these interface lines load the head and pad prior to writing. These lines are not gated with the unit select.

Output Status Lines.

Selected and Ready. When true, this line indicates that a diskette is inserted, the door is closed, the drive is up to speed and the unit can receive a write or read command.

Ready (0-3). When true, these lines indicate which units are ready in the daisy chains. These lines are not gated with select.

Sector. When true, this line indicates that a sector hole has been detected.

Read Data (applicable on single density only). When true, this line indicates that a "logic one" is present.

Read Clock (separated clock applicable on single density only). When true (pulse), this line defines the beginning of a bit cell.

Seek Busy. When true, this line indicates that a selected drive is busy seeking to a new track.

We've earned a good reputation with OEMs; We simplify your job.

Pertec understands volume production and we're sophisticated in our approach to OEM needs. After all, we have more than 80,000 tape transports, disk drives and flexible disk drives in operation throughout the world.

To assist you in your systems design, we provide comprehensive support documentation and application information for our flexible disk drives.

We're counting on our flexible disk drives to make our good reputation with OEMs even better.

Increase your sales and profits by building the Pertec Flexible Disk Drives into your next system. Compare our FD400 and FD500 flexible disk drives with the others—we're confident about your decision.

Regardless of your application, you'll find that the features, specifications and benefits of Pertec's flexible disk drives offer you the best selection for your system requirements.

Call the Pertec sales engineer in your area today. He's qualified to assist you in your selection of peripherals. He can also provide you with Application Notes detailing the sector formats for our flexible disk drives. Or Write Pertec, Peripheral Equipment Division, 9600 Irondale Avenue, Chatsworth, California 91311. For immediate assistance call (213) 882-0030.

Please refer to the following pages for individual features and options of the FD400, FD5X0, and FD511 models.

INTERFACE DESCRIPTION: FD400, 5X0 AND 511

Input Control Lines

Step In and Step Out. The head is displaced one track increment for each pulse received. A pulse on the "Step In" line moves the head to a higher order track (toward the center of the disk). A "Step Out" pulse moves the head to a lower order track. Both lines are to be held false when no head movement is desired.

Drive Motor On. The disk drive motor starts and continues to run as long as this line is held true. (FD400 only).

Head Load. The head load solenoid energizes and remains energized as long as this line is held true.

Head Current Switch. This provides a resolution balance between high and low order tracks to ensure IBM compatibility.

Write Enable. This line enables the write current driver to respond to input write data. "Write Enable" must be true only during the writing period to prevent the loss of pre-recorded data.

External Trim Erase (user programmable). This line provides independent control of the trim eraser of the data track. When low, this line allows erase current to flow in the erase head.

Output Status Lines


Track '0'. The level on this line is true when the head is positioned at track '0'. It goes true approximately 20 milliseconds after the last "step-out" command.

Index. The pulse on this line indicates that the index hole has been detected. The duration of the pulse is a function of the disk index hole size for FD400 and 5X0 models.

Door Open. The door open line is true whenever the drive's door is open.

Write Protect. This line is true when the diskette is write protected.

Write Busy. This line is true when Write Enable is true and terminates when the internal trim erase is turned off.

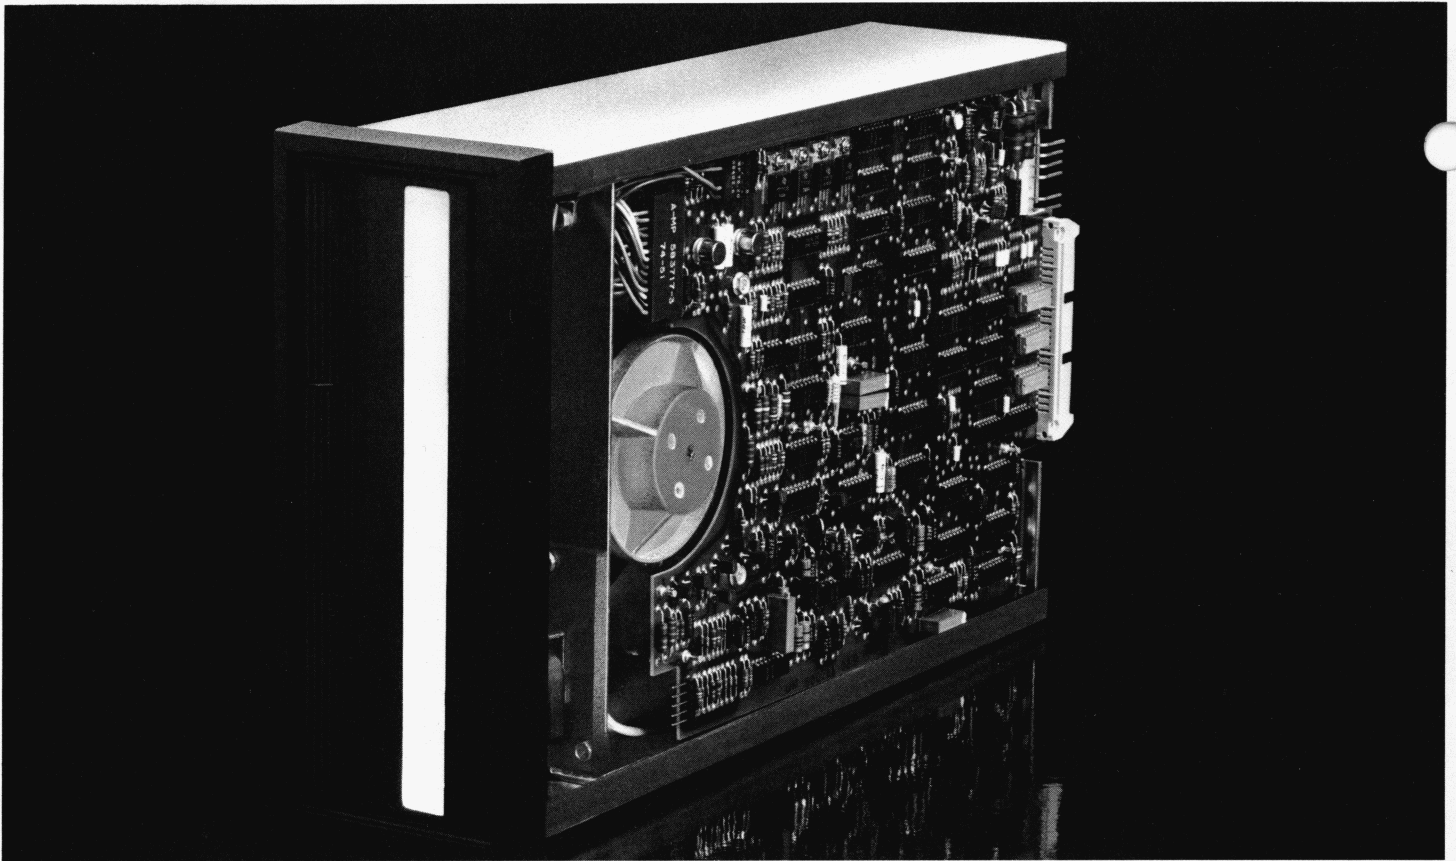


PERTEC FD511 FLEXIBLE DISK DRIVE

STANDARD FEATURES

- AC Spindle Drive: Available at 50 or 60 Hz at standard international or domestic voltages.
- Single/Double Density: Inherent in the FD511 is the ability to provide either 3268 BPI or 6536 BPI at the inner track.
- Hard/Soft Sectoring: With a compatible index sector sensor for both hard and soft sectoring.
- Two-State Positive Latching Door: Provides operator convenience for removal and replacement of diskette.
- Internal Trim Erase Timing: No need for the customer to concern himself with special timing for external control.
- Power Interrupt: Power supplies are voltage sensed to prevent glitching of diskette to provide you with more reliable data processing.
- Daisy Chain Logic: The FD511 contains all the logic required to daisy chain up to four units.
- Data Separation: In single density operation, data and read clock are separated at the interface to reduce controller hardware costs.
- Composite Index/Sector Signal: The unit provides composite index/sector information as is found in soft sector operation.
- 50 Pin Ribbon Cable I/O.
- Black trim is standard on FD511.

OPTIONAL FEATURES ON THE FD511

- Write Protect: The FD511 is not allowed to write when the write protect hole on the diskette is detected.
- —12V / —15V Negative Supply: The user can change from standard —5V to —12 / —15V by a simple jumper change.
- External Erase Timing: For those customers who prefer external trim erase timing, the user can change from internal timing to external timing by a simple jumper change.
- Power Save: Low power in the head unload or unit not selected mode can be implemented by the customer.
- Drive Select: A standard drive is set at address "0". In a daisy chain configuration, the unit address may be changed to 1, 2, or 3.
- Head Load Select: A standard drive is designated "0". When in a daisy chain configuration, head load select can be changed to 1, 2 or 3. This allows the head to be loaded without having to select the unit.
- Unit Select and Ready: A standard drive is designated "0". When used in daisy chain configuration, each unit can be designated to be 1, 2, or 3.
- Separated Index/Sector Information: A standard unit is set for soft sectoring. When using the unit in a hard sector configuration, the customer can provide separated index and sector information to the interface by changing the jumpers.
- Direction/Step Logic: A standard unit is configured for step in/step out control. This can be reconfigured to direction and step control by a simple jumper change.

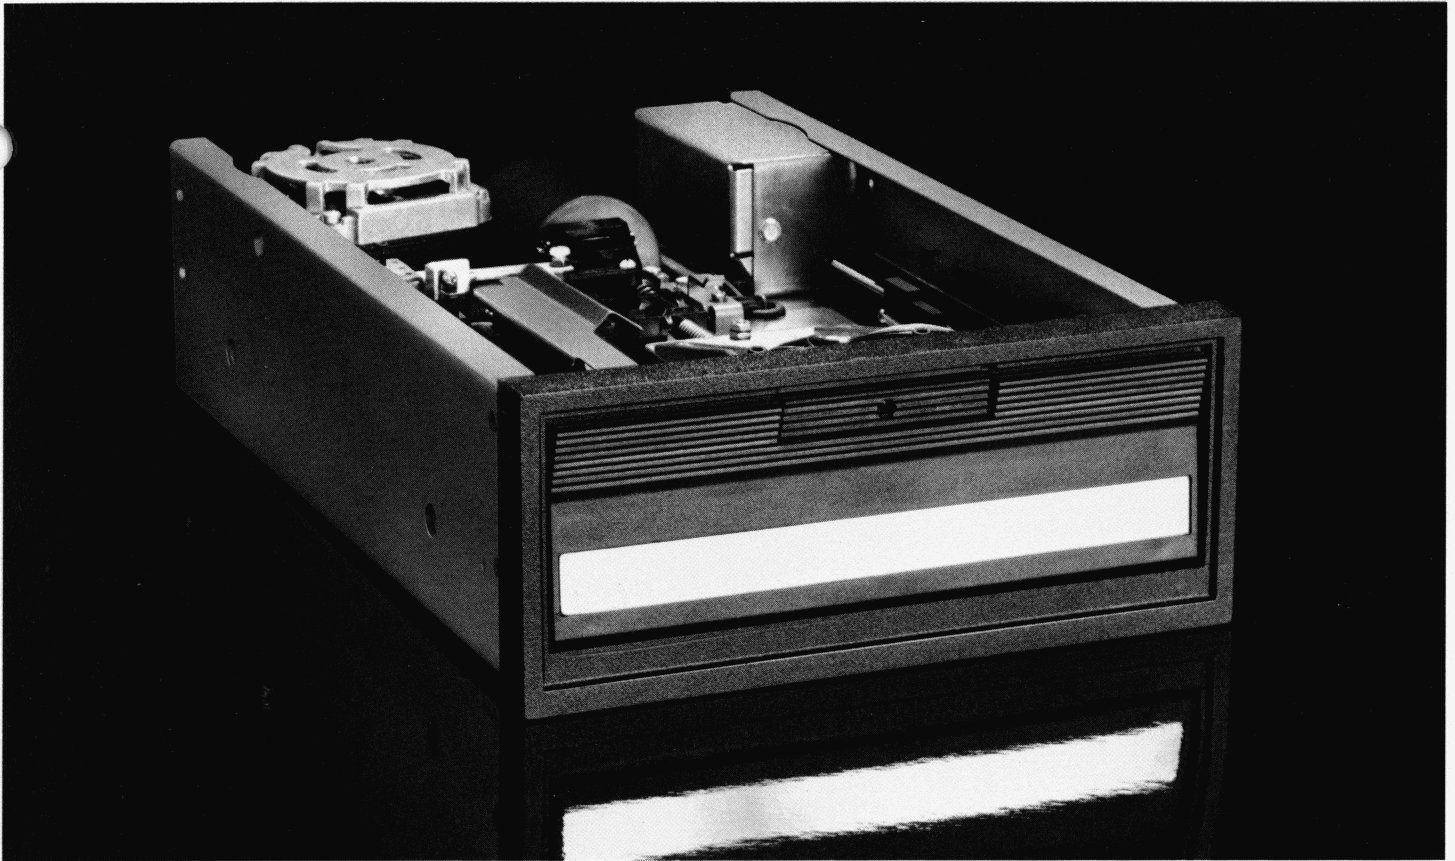


PERTEC FD5X0 FLEXIBLE DISK DRIVE

STANDARD FEATURES

- AC Spindle Drive: Available at 50 or 60 Hz at standard, international or domestic voltages.
- Single Density: Standard density is 3268 BPI at the inside track. Also optional single/double density 3268/6536 BPI version is available.
- Hard/Soft Sectoring: With a compatible index sector sensor for both hard and soft sectoring.
- Two-State Positive Latching Door: Provides operator convenience for removal and replacement of diskette.
- Internal Trim Erase Timing: No need for a customer to concern himself with special timing for external control.
- Power Interrupt: Power supplies are voltage sensed to prevent glitching of diskette to provide you with more reliable data processing.
- 44 Pin PC Edge Connector.
- Black Trim is Standard on FD5X0.

OPTIONAL FEATURES OF THE FD5X0

- Double Density: The FD5X0 can be specified for double density operation.
- Write Protect: The FD5X0 cannot write when the write protect hole on the diskette is detected.
- —12V / —15V Negative Supply: The user can change from standard —5V to —12V / —15V by a simple jumper change.
- External Erase Timing: For those customers who prefer external trim erase timing to internal timing, the user can switch by simply making a jumper change.
- Power Save: Low power in the head unload or unit not selected mode can be added by the customer.

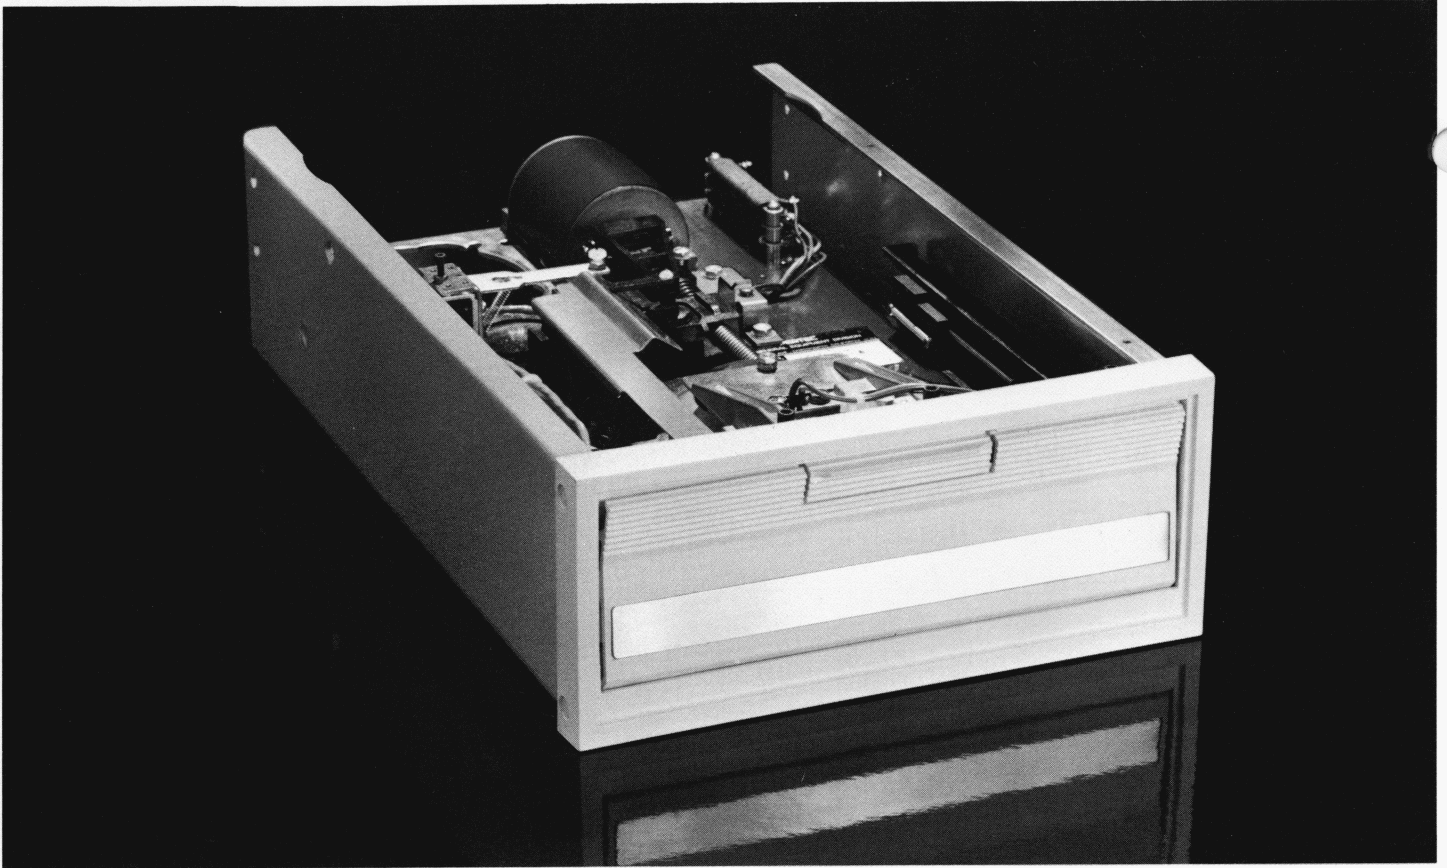

PERTEC FD400: FLEXIBLE DISK DRIVE

STANDARD FEATURES

- DC Spindle Drive: No need for a customer to concern himself with international power requirements.
- Single Density: 3268 BPI inside track, 3.2 million bits unformatted or 242,944 bytes in IBM format.
- Hard/Soft Sectoring: With compatible index sensor for both hard and soft sectoring.
- Two-State Positive Latching Door: Provides operator convenience for removal and replacement of diskette.
- Internal Trim Erase Timing: No need for customer to concern himself with special timing for external control.
- Power Interrupt: Power supplies are voltage sensed to prevent glitching of diskette to provide you with more reliable data processing.
- 44 Pin PC Edge Connector.
- White Trim is Standard on FD400.

OPTIONAL FEATURES ON THE FD400

- Write Protect: The FD400 cannot write when the write protect hole on the diskette is detected.
- —12V / —15V Negative Supply: The user can change from standard —5V to —12V / —15V by a simple jumper change.
- Power Save: Low power in the head unload mode can be added by the customer.

Pertec Flexible Disk Drive Specifications

Media	IBM "Diskette" or equivalent		
Tracks per Inch	48		
Number of Tracks	77		
Read / Write Track Width	0.047 mm (0.012 inches)		
Dimensions	8.8 cm high (3.45 inches), 21.8 cm wide (8.6 inches), 35.6 cm deep (14 inches)		
Weight	6.35 kg (14 pounds)		
Environment			
Temperature	Operating: +10°C to +42°C (+50°F to +110°F) Non-operating: -40°C to +71°C (-40°F to +160°F)		
Relative Humidity	Operating: 20% to 80% Non-operating: 5% to 95% (non-condensing)		
Operating Shock	1.5 G for 11 msec.		
Vibration	6-600 Hz 0.5 G peak		
Performance			
Seek Time	10 msec. track to track		
Head Setting Time	20 msec. (last track addressed)		
Head Loading Time	40 msec. maximum		
Error Rate (Maximum)	1 per 10 ⁹ recoverable, 1 per 10 ¹² non-recoverable		
Head Life	20,000 hours in normal use		
Media Life	5 x 10 ⁶ passes on a single track		
Disk Speed	FD511 360 rpm ±1.5% ±1.6%/Hz @ 60 Hz ±2%/Hz @ 50 Hz	FD5X0 360 rpm ±1.5% ±1.6%/Hz @ 60 Hz ±2%/Hz @ 50 Hz	FD400 360 rpm ±1.5% ±1.75% 15V
Start Stop Time	2 seconds max.	2 seconds max.	5 seconds max.
Recording Parameters			
Transfer Rate	250/500 K bits/sec.	250 K bits/sec. Optional: 500 K bits/sec.	250 K bits/sec.
Recording Density (inside track)	3268/6536 bpi	3268 bpi Optional: 6536 bpi	3268 bpi
Maximum Bits per Disk (unformatted)	3.2/6.4 million	3.2 million Optional: 6.4 million	3.2 million
Maximum Bits per Track (unformatted)	41,665/83,330	41,665 Optional: (83,330)	41,665
Recording Mode	FM/Double Density	FM Optional: Double Density	FM
Power Requirements			
	+ 24 vdc ±1v at 1.4 amps maximum + 5vdc ±0.25 at 1.4 amps maximum -5vdc ±0.25v at 0.3 amps maximum 90 - 130V AC at 60 Hz 190 - 250V AC at 50 Hz 90 - 120V AC at 50 Hz	+ 24 vdc ±1v at 1.4 amps maximum + 5vdc ±0.25 v at 1.1 amps maximum -5vdc ±0.25v at 0.3 amps maximum 90 - 130V AC at 60 Hz 190 - 250V AC at 50 Hz 90 - 120V AC at 50 Hz	+ 24vdc ±1v at 2 amps maximum (average) + 5vdc ±0.25 at 1.1 amps maximum -5vdc ±0.25v at 0.3 amps maximum

PERTEC

PERIPHERAL EQUIPMENT DIVISION

9600 Irondale Avenue, Chatsworth, California 91311
Phone (213) 882-0030 / TWX 910-494-2093

WESTERN REGION SALES:

Encino, California 91316, 17835 Ventura Boulevard, Suite 111 • (213) 996-1333 • TWX: 910-493-2075
San Mateo, CA 94402, 1670 Amphlett Blvd., Suite 310 • (415) 349-9184 • TELEX: 349389 DYNALOC SMT

CENTRAL REGION SALES:

Rosemont, Illinois 60018, 6300 North River Road, Suite 101 • (312) 696-2460 • TWX: 910-253-5918
Minnetonka, Minnesota 55343, 3815 Wilmatt Hill Road • (612) 933-1030 • TWX: 910-253-5918
Dallas, Texas 75240, 13500 Midway, Suite 403 • (214) 387-2855 • TWX: 910-860-5236

EASTERN REGION SALES:

Hudson, New Hampshire 03051, 1001 Executive Drive • (603) 883-2100 • TWX: 710-228-1377
Stamford, Connecticut 06905, 35 West Lane • (203) 348-3949 • TWX: 710-474-3277
Malvern, Pennsylvania 19355, 288 Lancaster Avenue • (215) 644-4910 • TWX: 510-668-5034

EUROPEAN SALES:

United Kingdom, 10 Portman Road, Reading, Berkshire RG3 1 DU • UK-Reading (734) 582115 • TELEX: UK-847101