


Designed for NC Applications

GNT 4604

Reader/Punch Station

Light and compact
Reliable and versatile

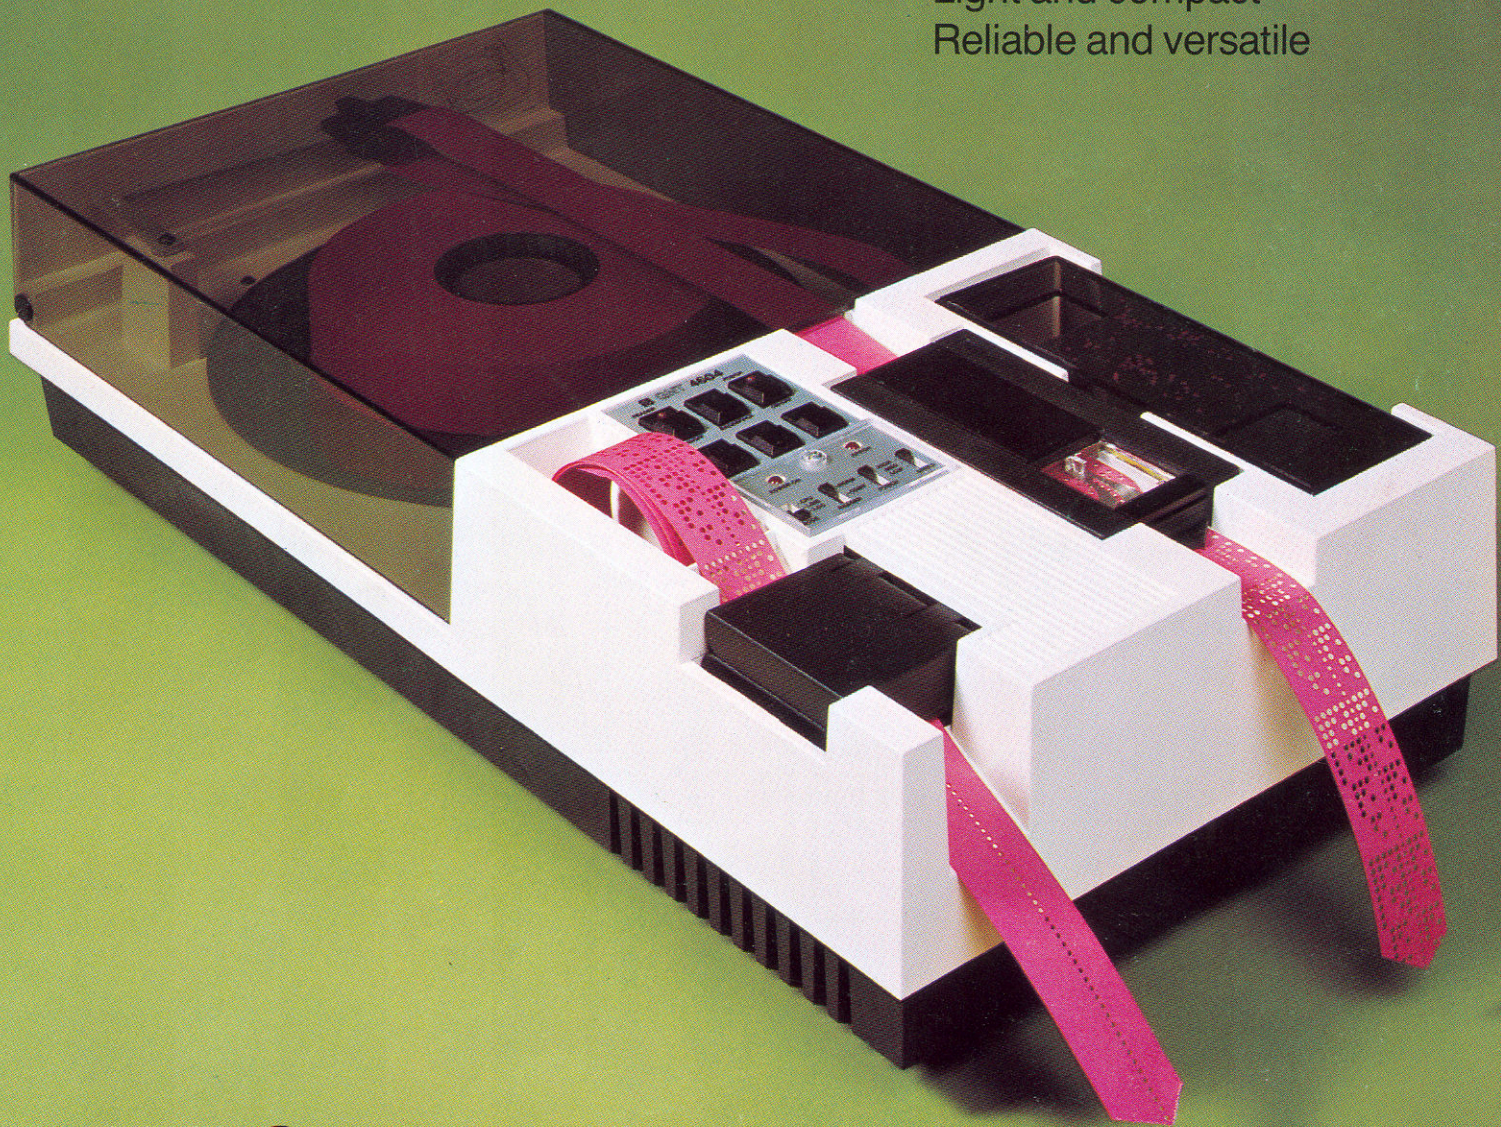




Communication with a NC machine.

General

The GNT 4604 is the ideal Reader/Punch combination for NC as well as CNC applications. It provides the link between the text editor on which programs are written and the NC machines which carry them out.

Applications

- Punching tape from a terminal, computer or word processor.
- Loading the NC machinery.
- Punching a program which has been modified on the NC machine.
- Copying and editing tapes.
- Code conversion.
- Sending/receiving programs via modem.
- Program storage.

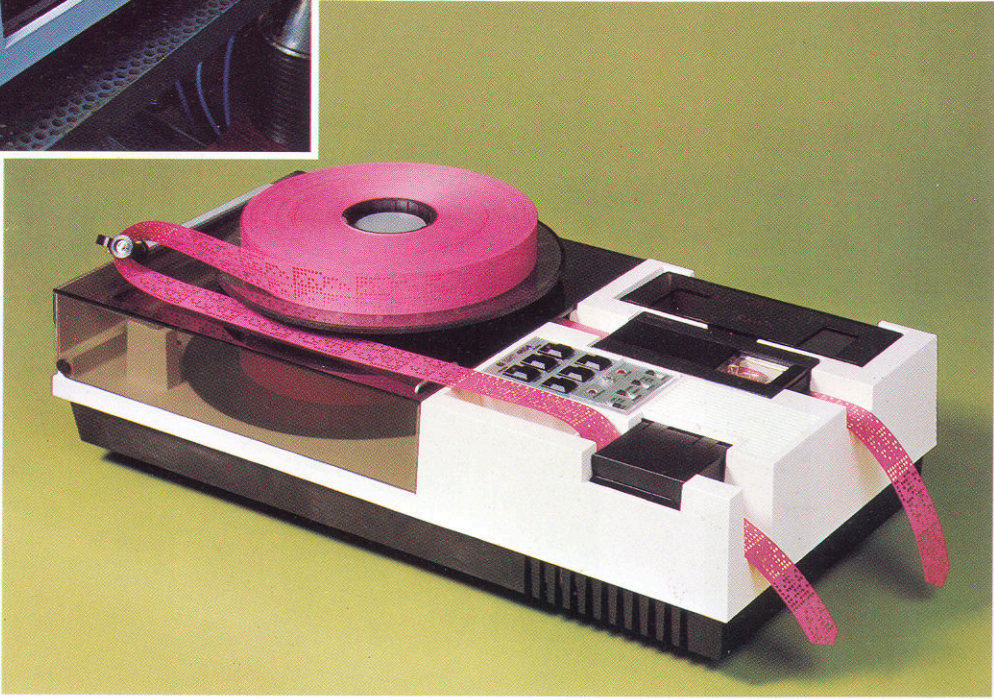

Using the optional unwinder.

Punch

GNT 4604 utilizes the highly reliable GNT 36 punch mechanism. The tape dispenser handles an 8" roll, maintains proper tape tension and signals taut tape and tape out.

Punching speed is up to 75 char./s.

Reader

The reader is the new GNT 29 with reading speed up to 400 char./s. The built-in tape container handles programs of up to 8 K-bytes.

For larger programs (up to 120 K) an unwinder is available.

Features

Complete Editing Facilities



- Line at-a-time.
- Character at-a-time
- Skip
- Backspace

Error Indication

- Tape out
- Taut tape
- Framing error

Interface

- Easy to interface with all types of NC equipment.
- 3 operating modes give flexible interface capability.
- Baud rates from 110 to 4800.
- RS 232C/V24 or RS491 standard.
- 20/60 mA current loop.
- Handshaking.

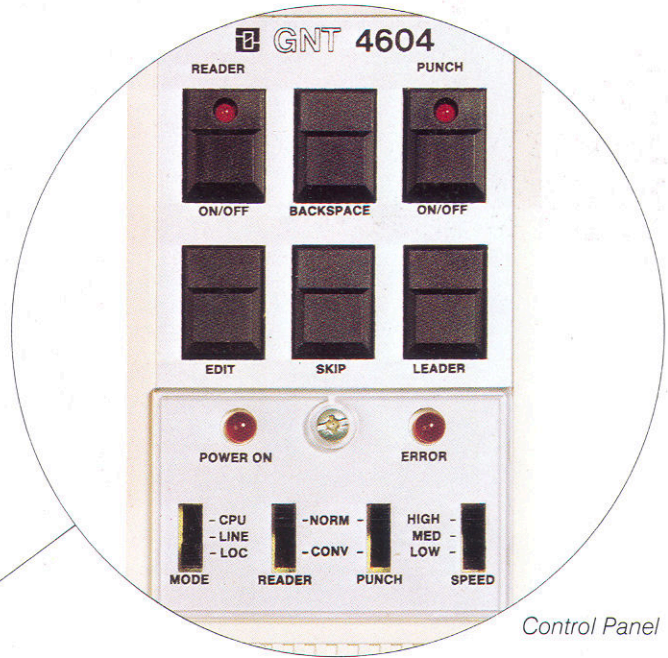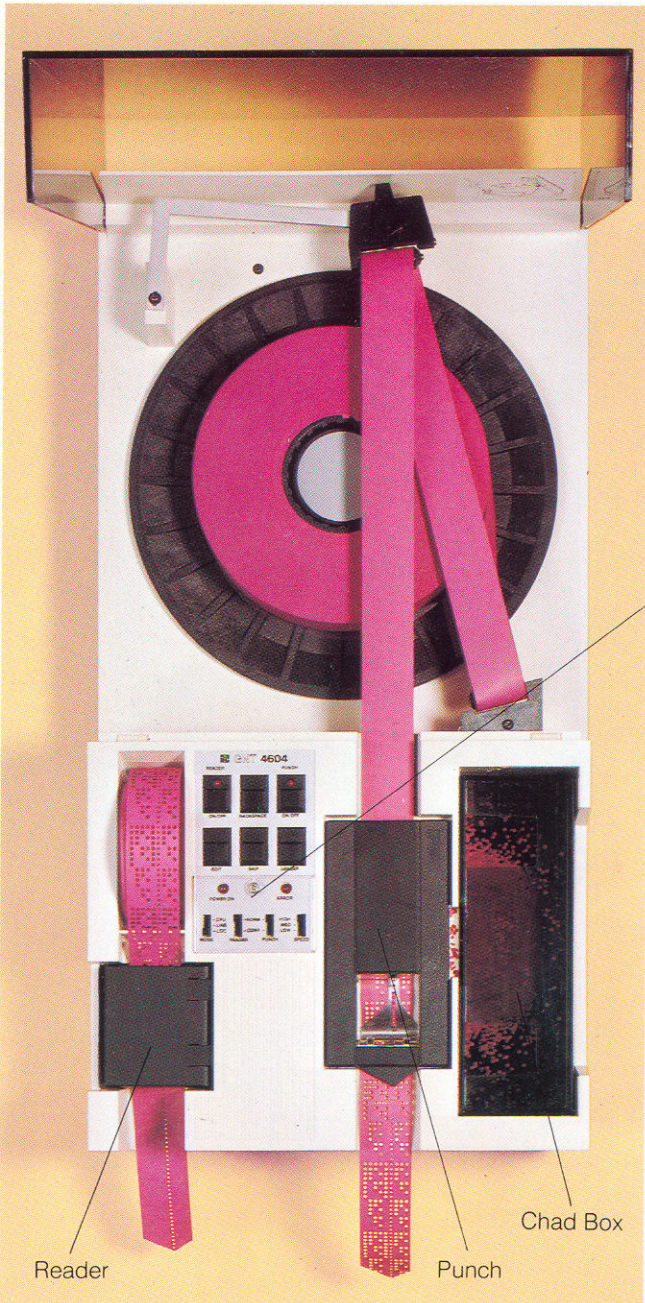

Selectable Parameters

- Mode.
- Speed.
- Remote Control.
- 7 or 8 bit word length.
- Parity check/generation.
- Codes: ASCII/ISO/EIA.
- Type of leader either feed holes or all channels.
- Echo.

Specifications

General

Dimensions:
 Length 477 mm
 Width 246 mm
 Height 125 mm

Weight: 6 kg

Environment

Temperature:
 Ambient operating:
 +5°C to +40°C
 Ambient storage:
 +40°C to +70°C

Humidity:
 15-95% RH, non-condensing

A. C. Supply (selectable)

Switch setting: 115V 220V
Voltage: 100-125V 200-250V
Frequency: 47-63 Hz 47-63Hz
Power: 95W 95W

DIP Switch Setting

SW 1 on off	Echo. (Local only). No function.				
SW 2 on off	LEADER. All channels and feed hole. Feed hole only.				
SW 3 on off	Remote control by DC code (XON/XOFF). Disabled.				
SW 4 on on off off	SW 5 on off on off	WORD LENGTH 7 bit 8 bit 8 bit 8 bit	PARITY CHECK None None Data to Punch Data from/to Reader/Punch		
SW 6 on off on off	SW 7 on on off off	LOW 110 Baud 150 Baud 150 Baud 200 Baud	MED 300 Baud 300 Baud 300 Baud 300 Baud	HIGH 600 Baud 1200 Baud 2400 Baud 4800 Baud	1 stop bit
SW 8 on off	Paper tape code ISO* Paper tape code EIA*				

* With Reader/Punch set to CONV.

Performance

Punching speed:
 up to 75 char./s.

Reading speed:
 up to 400 char./s.

Type of punching:
 8-unit (ISO-1154)



Data rates:
 from 110 to 4800 Baud

Codes:
 ASCII/ISO or EIA

Reliability:

MTBF: 3 x 10⁷ char.
MTRR: 30 min.

Input and Output signals



To DTE (Terminal)
 Signal connectors, seen from rear

1	PG	Protective Ground
2	TD	Transmitted Data
3	RD	Received Data
4	RTS	Request To Send
5	CTS	Clear To Send
6	DSR	Data Set Ready
7	SG, Tx-	Signal Ground. Current loop transmit
9	Tx+	Current loop transmit
13	Rx-	Current loop receive
18	Rx+	Current loop receive
20	DTR	Data Terminal Ready

To DCE (Modem)

The pin configurations of the 2 connectors are identical, but signal directions are reversed. Undesignated pins of the same number are connected together to give a direct throughput. All signals - except current loop - in accordance with CCITT V24 and V28. Current loop 20/60 mA, passive.

Tape

For punch (GNT 36):

Material:
 According to ISO 1729

Forms:
 Rolls max. diameter 8",
 standard 2" core

Width:
 1" (25.4 mm), 8-unit

Thickness:
 0.05 - 0.12 mm

For reader (GNT 29):

Material:
 Any with transmissivity up to 50%

Form:
 Rolls up to 3" (75 mm)
 With supply reel option, 8"
 (200 mm) roll

Width:
 1" (25.4 mm), 8-unit

Specifications subject to change.

WNC

Patti
 Customer Service

www.wncsupply.com • email: sales@wncsupply.com

37841 N 16th Street • Phoenix, AZ 85086-0752
 Phone (623) 594-4602 • Fax (623) 594-3769

Authorized Dealer For:  KOH-I-NOOR®

**PLOTTER PAPER & PENS • INKJET MEDIA
 PLOTTER VELLUM & FILM • RAPIDOGRAPH • PAPER TAPE**